

A9...A300, 3-pole Contactors










Description: A9...A300 contactors are mainly used for controlling 3-phase motors and power circuits up to 690VAC, the contactors are of the block type design with:

-3 main poles and 1 built-in auxiliary contact;

-control circuit: AC operated;

-add-on auxiliary contact blocks for front or side mounting and a wide range of accessories;

Technical Data

Rated Operational power, 400V AC-3, kW	Current, $\theta \leq 40^\circ\text{C}$ AC-1, A	Auxiliary Contacts		Type	Order Code	Weight Pack 1 Piece	
							
 A9, A12, A16	4	25	1	0	A9-30-10	1SBL141001R□□10	0.340
			0	1	A9-30-01	1SBL141001R□□01	
 A26	5.5	27	1	0	A12-30-10	1SBL161001R□□10	0.340
			0	1	A12-30-01	1SBL161001R□□01	
 A30, A40	7.5	30	1	0	A16-30-10	1SBL181001R□□10	0.340
			0	1	A16-30-01	1SBL181001R□□01	
 A50, A63, A75	11	45	1	0	A26-30-10	1SBL241001R□□10	0.600
			0	1	A26-30-01	1SBL241001R□□01	
 A95, A110	15	55	1	0	A30-30-10	1SBL281001R□□10	0.710
			0	1	A30-30-01	1SBL281001R□□01	
 A145, A185	18.5	60	1	0	A40-30-10	1SBL321001R□□10	0.710
			0	1	A40-30-01	1SBL321001R□□01	
 A210, A260, A300	22	100	1	0	A50-30-10	1SBL351001R□□10	1.160
			0	1	A50-30-01	1SBL351001R□□01	
	30	115	1	0	A63-30-10	1SBL371001R□□10	1.160
			0	1	A63-30-01	1SBL371001R□□01	
	37	125	1	0	A75-30-10	1SBL411001R□□10	1.160
			0	1	A75-30-01	1SBL411001R□□01	
	45	145	1	0	A95-30-10	1SBL431001R□□10	2.000
			0	1	A95-30-01	1SBL431001R□□01	
	55	160	1	0	A110-30-10	1SBL451001R□□10	2.000
			0	1	A110-30-01	1SBL451001R□□01	
	75	250	1	0	A145-30-10	1SBL471001R□□10	3.500
			0	1	A145-30-01	1SBL471001R□□01	
	90	275	1	0	A185-30-10	1SBL491001R□□10	3.500
			0	1	A185-30-01	1SBL491001R□□01	
	110	350	1	0	A210-30-10	1SBL511001R□□10	6.100
			0	1	A210-30-01	1SBL511001R□□01	
	140	400	1	0	A260-30-10	1SBL531001R□□10	6.100
			0	1	A260-30-01	1SBL531001R□□01	
	160	500	1	0	A300-30-10	1SBL551001R□□10	6.100
			0	1	A300-30-01	1SBL551001R□□01	

Coil Voltages and Codes: A9...A300

Voltage, 50Hz	Voltage, 60Hz	Voltage, 60Hz	Code, □□
24	24	24	8 1
48	48	48	8 3
110	110...120	110...120	8 4
220...230	230...240	230...240	8 0
230...240	240...260	240...260	8 8
380...400	400...415	400...415	8 5
400...415	415...440	415...440	8 6




A145, A185




A210, A260, A300

A9...A300, 3-pole Contactors


Main dimension mm, inches




A9, A12



A26



A30, A40

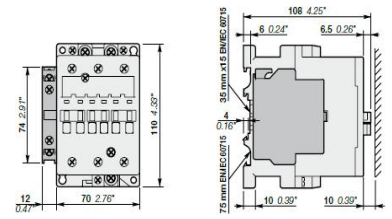

A50, A63, A75