


**MCBs DNX and DNX<sup>3</sup>, 3000**

thermal magnetic MCBs from 6A to 32A, C curve

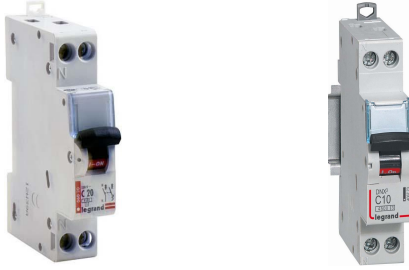

Conform to IEC 60898-1;  
Compatible with prong-type supply busbars;  
Breaking capacity: 3000-IEC 60898-1, 230VAC;  
Do not accept auxiliaries, and RCD add-on modules

Modules	Nominal Rating, In	Category Number	Quantity/Pack
<b>Single Pole + N, 230VAC, Neutral on Left-Hand Side</b>			
6		4 194 96	12/120
10		4 194 97	12/120
16		4 194 99	12/120
20		4 195 00	12/120
25		4 195 01	12/120
32		4 195 02	12/120

**Pulse Operated Latching Relays CX<sup>3</sup>**

Conform to standard EN 60669-2-2;  
Maximum 2 auxiliary devices per latching relay



**Single Pole, 16A, 250VAC**

Cat. Nos	Control Voltage	Type of Contact	Quantity/Pack
4 124 04	12V	1 N/O	12/120
4 124 05	24V	1 N/O	12/120
4 124 08	230V	1 N/O	12/120

**2-Pole, 16A, 250VAC**

4 124 10	24V	2 N/O	12/120
4 124 11	48V	2 N/O	12/120
4 124 12	230V	2 N/O	12/120

**N**

**RCCBs RX<sup>3</sup>-Residual Current Circuit Breakers**

from 25A to 63A, AC and A types



Conform to IEC61008-1;  
Compatible with prong-type supply busbars:  
●AC type: detect AC component faults;  
●A type: detect AC and DC component faults;  
Do not accept add-on modules;

Modules	In, A	Sensitivity, mA	Category Number	Quantity/Pack
<b>2-pole 230VAC, AC Type</b>				
25	30		4 020 24	1/60
40	30		4 020 25	1/60
63	30		4 020 26	1/60
80	30		4 020 27	1/60
25	100		4 020 28	1/60
40	100		4 020 29	1/60
63	100		4 020 30	1/60
25	300		4 020 32	1/60
40	300		4 020 33	1/60
63	300		4 020 34	1/60

**2-pole 230VAC, A Type**

25	30		4 020 36	1/60
40	30		4 020 37	1/60
63	30		4 020 38	1/60

**4-pole 400VAC, AC Type, Neutral on Right-Hand Side**

25	30		4 020 62	1/30
40	30		4 020 63	1/30
63	30		4 020 64	1/30
25	100		4 020 66	1/30
40	100		4 020 67	1/30
63	100		4 020 68	1/30
25	300		4 020 70	1/30
40	300		4 020 71	1/30
63	300		4 020 72	1/30

**4-pole 400VAC, A Type, Neutral on Right-Hand Side**

25	30		4 020 74	1/30
40	30		4 020 75	1/30
63	30		4 020 76	1/30